


JACKET PLUG VALVE CLASS 300LB RF NPS 4"

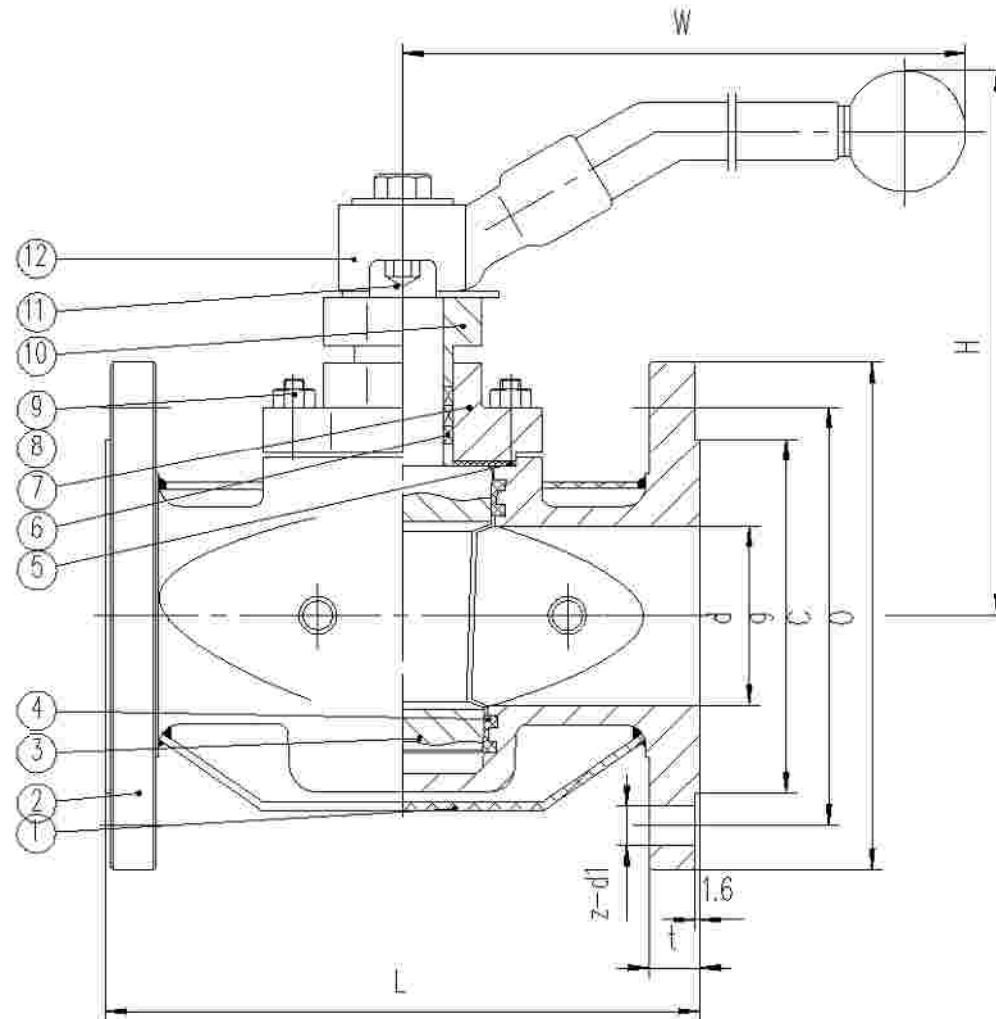

Performance Standard			
Class		300lb	
Test Pre-ssure	Shell Test	7.5	MPa
	Seal Test	5.5	
	Air Test	0.6	
Suitable Temp.		≤120	°C
Suitable Medium:		W.O.G	

Main parameter specification

- 1 Design and manufacture: API 599.
- 2 End Flange Dimensions: ASME B16.5.
- 3 Face to face: ANSI B16.10.
- 4 Pressure test: API 598.
- 5 Pressure-Temp: ASME B16.34.
- 6 The 0.6MPa Steam Pass In Jacket.
- 7 Jacket Connection Pipe with NPT 1/2.

12	Wrench	A216 WCB
11	Adjust bolt	A193 B7
10	Gland flange	A216 WCB
9	Bolt	A193 B7
8	Nut	A194 2H
7	Bonnet	A216 WCB
6	Packing	PTFE
5	Gasket	PTFE
4	Seat	PTFE
3	Plug	A351 CF8M
2	Body	A216 WCB
1	Jacket	CS
No	Parts Name	Material

NPS		General dimensions					Flange dimensions				
in	mm	d	L	H	W	O	C	g	t	z-d1	
4x6"	100	102	305	190	700	318	270	216	37	12-φ22	



THE BEST SOLUTION TO YOUR CORROSIVE PROBLEMS

1405, Avenue 440,
Suite 2145, Chomedey
Laval, Quebec H1L 3W1,
CANADA

Any Copy, Reproduction Or Translation Of This
Information Either Wholly Or In Part, Without
The Express Written Agreement Of VALVTEC
Canada Is Expressly Forbidden