


Plug Valve DN: 25~80 PN:10

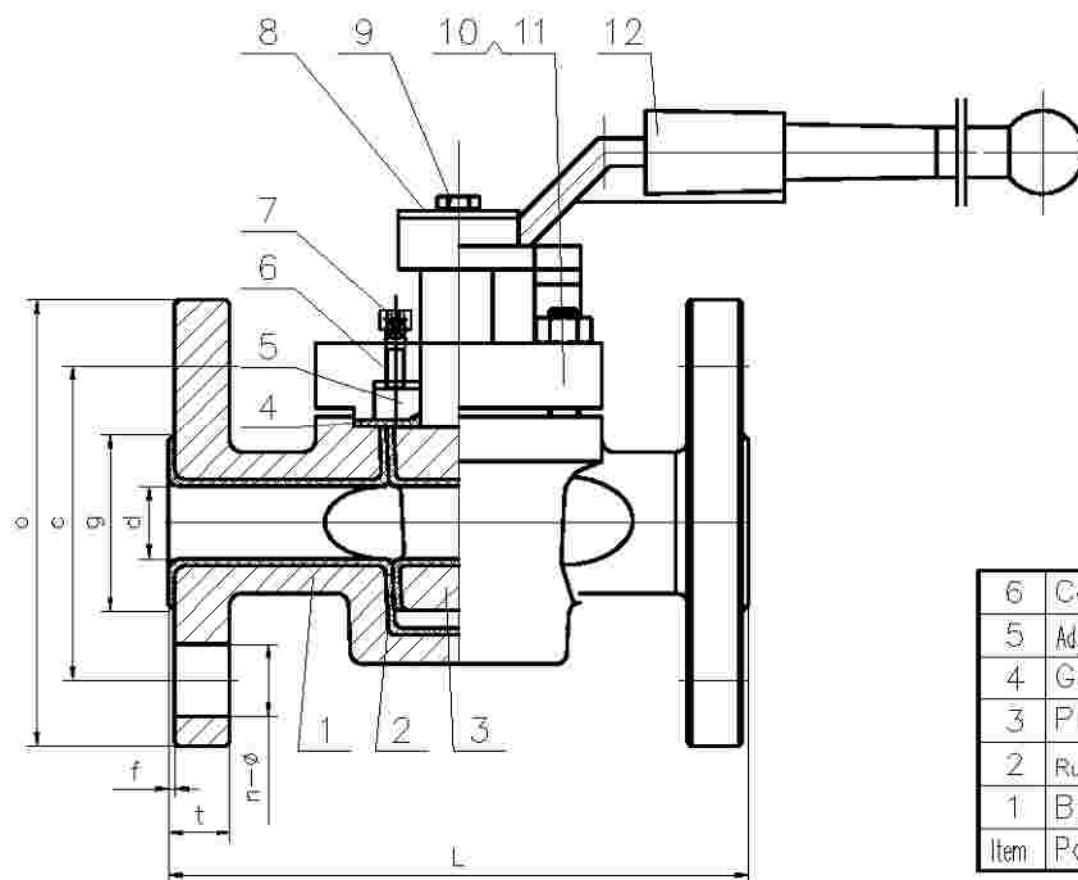

STANDARD

1. DESIGN&MANUFACTURER CONFORMS TO API 599, API 6D
2. TEST CONFORMS TO API 598
3. FLANGE TO EN 1092-1
4. END TO END CONFORMS TO DIN 3202 F1
5. TEMPERATURE CONFORMS TO ANSI B16.34

MAIN PROPERTY

NOMINAL PRESSURE	10C
SHELL TEST	1.5MPa
SEALING TEST	1.1MPa
SUITABLE MEDIUM	WATER,OIL,STEAM ETC
SUITABLE TEMP	<130℃

6	Cover	A216 WCB	12	HANDLE	A536
5	Adjusting Plate	A276 SS304	11	Nut	A194 2H
4	Gasket	PTFE	10	Bolt	A193 B7
3	Plug	A216 WCB+FEP(F46)	9	Nut	A194 2H
2	Rubber liner	FEP(F46)	8	Gasket	420SS
1	Body	A216 WCB	7	Bolt	A193 B7
Item	Part Name	Material	Item	Part Name	Material



THE BEST SOLUTION TO YOUR CORROSIVE PROBLEMS

1609, Autosants-440,
Suite 214A, Chomedey
Laval, Quebec, H3L 4W3,
CANADA

Any Copy, Reproduction Or Translation Of This
Information Either Wholly Or In Part, Without
The Express Written Agreement Of VALVTEC
Canada Is Expressly Forbidden

DN	d	L	o	c	g	t	f	n-ø
25	25	160	115	85	68	18	2	4- 14
80	76	310	200	160	138	20	3	8- 18