


ANSI Sleeve Plug Valve DN: 80~200 PN: 10

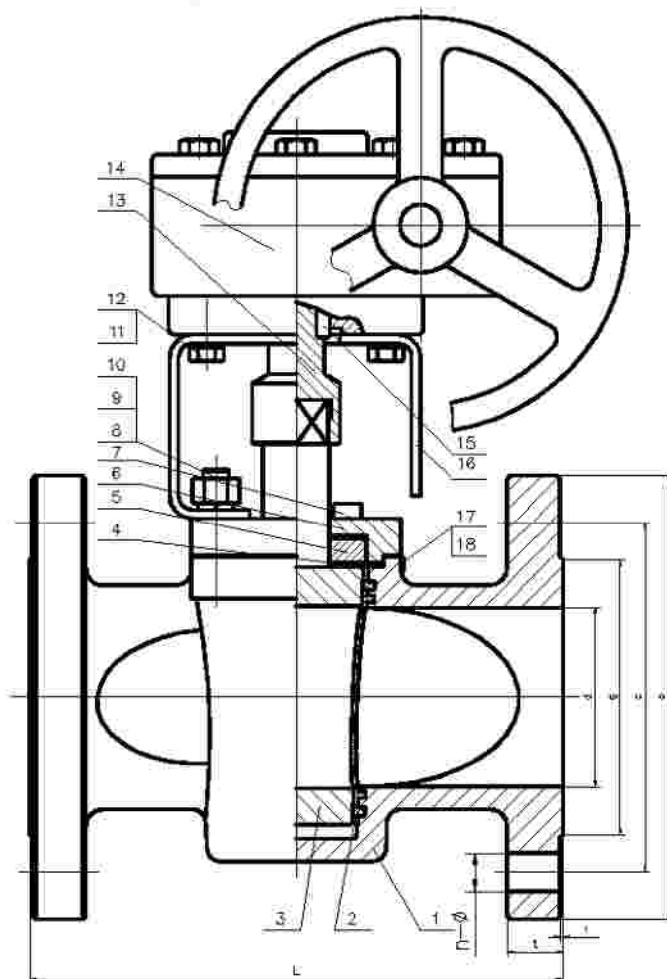

STANDARD

1. DESIGN/MANUFACTURE CONFORMS TO API 599, API 6D
2. TEST CONFORMS TO API 598
3. FLANGE TO EN1092-1
4. END TO END CONFORMS TO ANSI B16.10, DN80 CONFORMS TO DIN 202
5. TEMPERATURE CONFORMS TO ANSI B16.34

MAIN PROPERTY

NOMINAL PRESSURE	10
SHELL TEST	1.5MPa
SEALING TEST	1.1MPa
SUITABLE MEDIUM	WATER, OIL, STEAM ETC
SUITABLE TEMP	≤150℃

10	Bolt	A193 B8M			
9	Nut	A194 8M			
8	Gasket	304SS	18	Rivet	Brass
7	Stud	A193 B8M	17	Name Plate	St.St.
6	Cover	A351 CF8M	16	Yoke	SS304
5	Adjusting Plate	A276 SS304	15	Key	1045
4	Gasket	PTFE	14	Worm Gear	
3	Plug	UB6	13	Worm Gear spool	1045
2	Sleeve	PTFE	12	Gasket	304SS
1	Body	UB6	11	Stud	A193 B8M
Item	Part Name	Material	Item	Part Name	Material

200	203	292	340	295	268	24	3	8-22
150	152	267	285	240	212	22		8-22
80	76	310	200	160	138	20		8-18
DN	d	L	ø	c	g	t	f	n-ø



THE BEST SOLUTION TO YOUR CORROSIVE PROBLEMS

1605, Autoroute 440,
Suite 2145, Chénouay,
Laval, Québec H7L 1W2,
CANADA

Any Copy, Reproduction Or Translation Of This
Information Either Wholly Or In Part, Without
The Express Written Agreement Of VALVTEC
Canada Is Expressly Forbidden