


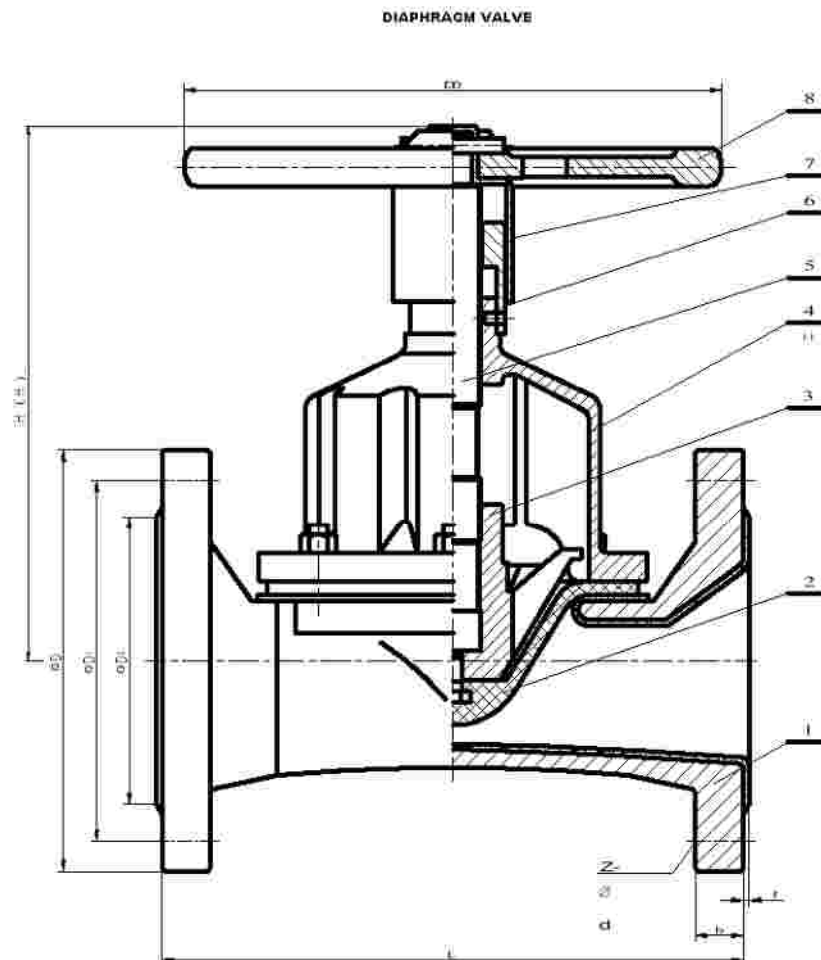

TECHNICAL REQUIREMENT

- 1 Design and Manufact per BS5156.
- 2 Face to face per BS5156.
- 3 Flange End Dimension per DIN2542 PN10.
- 4 Test and inspection per DIN 3230

DN	L	φD	φD ₁	φD ₂	D	b	f	H (H _{Open})	Z-φ _d
DN20	117	105	75	58	120	16	2	150 (162)	4-14
DN25	127	115	85	68	120	16	2	150 (162)	4-14
DN32	146	140	100	78	120	16	2	152 (180)	4-18
DN40	159	150	110	88	120	18	3	152 (180)	4-18
DN50	190	165	125	102	120	18	3	163 (198)	4-18
DN65	216	185	145	122	230	18	3	205 (227)	4-18
DN80	254	200	160	138	230	20	3	220 (252)	4-18
DN100	305	220	180	158	280	20	3	262 (300)	8-18
DN125	356	250	210	188	280	22	3	290 (335)	8-18
DN150	406	285	240	212	368	22	3	368 (427)	8-22
DN200	521	340	295	268	483	24	3	410 (470)	8-22
DN250	635	395	350	320	483	26	3	479 (569)	12-22
DN300	749	445	400	370	560	26	4	550 (650)	12-22
DN350	787	505	460	430	560	26	4	550 (650)	16-22
DN400	914	565	515	482	640	26	4		16-26

8	HAND WHEEL	1	
7	COVER	1	
6	COVER	1	
5	STEM	1	2Cr13
4	BONNET	1	GGG40
3	DISC	1	GG25
2	DIAPHRAGM	1	EPDM
1	BODY	1	GG25+NR



THE BEST SOLUTION TO YOUR CORROSIVE PROBLEMS

1605, Autostrada #10,
Suite 214A, Châteauguay,
Laval, Québec H7L 3W3,
CANADA

Any Copy, Reproduction Or Translation Of This
Information Either Wholly Or In Part, Without
The Express Written Agreement Of VALVTEC
Canada Is Expressly Forbidden