


TITLE :FLANGED CENTRIC LINE BUTTERFLY VALVE



9	GEAR OPERATED	CAST IRON	1	
8	KEY	CARBON STEEL	2	
7	O-RING	EPDM	2	
6	BUSHING	P.T.F.E.	5	
5	SEAT	EPDM	1	
4	PIN	Stainless Steel	3	
3	DISC	GGG40	1	
2	STEM	SS410	1	
1	BODY	GG25	1	
NO.	PARTS NAME	MATERIAL	QTY	
TEST PRESSURE		SHELL	SEAL	
	HYDROSTATIC	24 kg/cm ²	17.6 kg/cm ²	
	AIR			
STANDARD	DESIGN CODE	BS5155		
	INSPECTION & TEST	DIN 3230 PART 3		
	END STANDARD	DIN PN16		
	FACE TO FACE	DIN 3202K1		

SIZE	A	B	C	D	Ød0	ØD1	N-φ	4-M	ØD2	L	F1	F2	F3	F4	F5	H	ØK	ØE	8-Ød	JX2
28"	624	520	163	695	63.35	840	20-36	4-M33	910	100	165	162	189	183	244	157	300	254	8-Ø18	18
30"	660	539	167	745	63.35	900	20-36	4-M33	970	110	165	162	189	183	244	157	300	254	8-Ø18	18
32"	672	591	188	795.4	63.35	950	20-39	4-M36	1025	110	165	162	189	183	244	157	300	254	8-Ø18	18
36"	720	656	203	864.7	75	1050	24-39	4-M36	1125	118	215	196	220	215	270	235	300	254	8-Ø18	20
40"	800	721	216	965	85	1170	24-42	4-M39	1255	142	215	196	220	215	270	235	300	254	8-Ø18	20
48"	940.7	844.1	276	1163	105	1390	28-48	4-M45	1485	154	215	196	214	310	458	310	350	298	8-Ø22	28

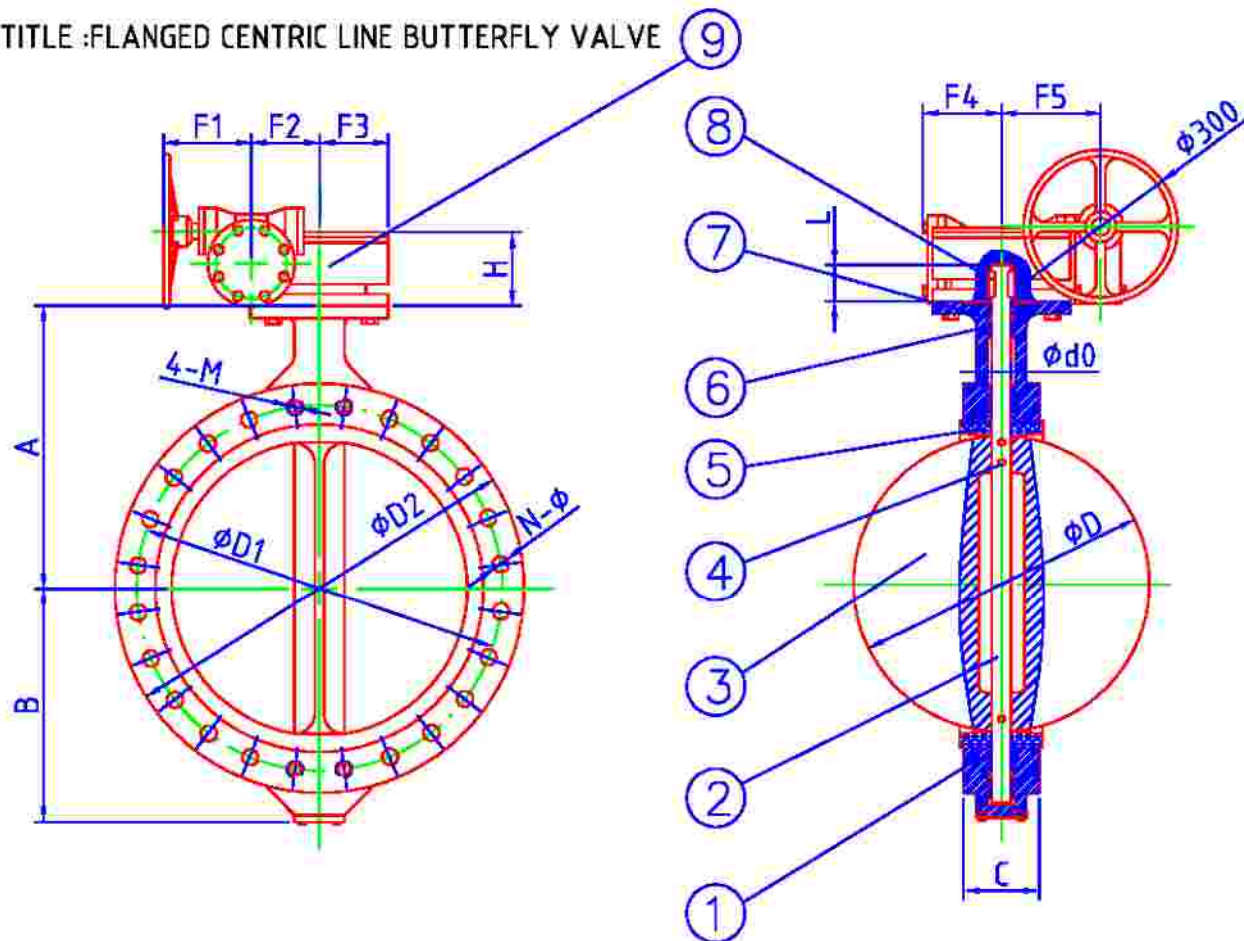

THE BEST SOLUTION TO YOUR CORROSIVE PROBLEMS

1000, Avenue 440,
Suite 210A, Chomedey,
Laval, Quebec, H1L 2W2,
CANADA

Any Copy, Reproduction Or Translation Of This
Information Either Wholly Or In Part, Without
The Express Written Agreement Of VALVTEC
Canada Is Expressly Forbidden