


## THERMODYNAMIC STEAM TRAP

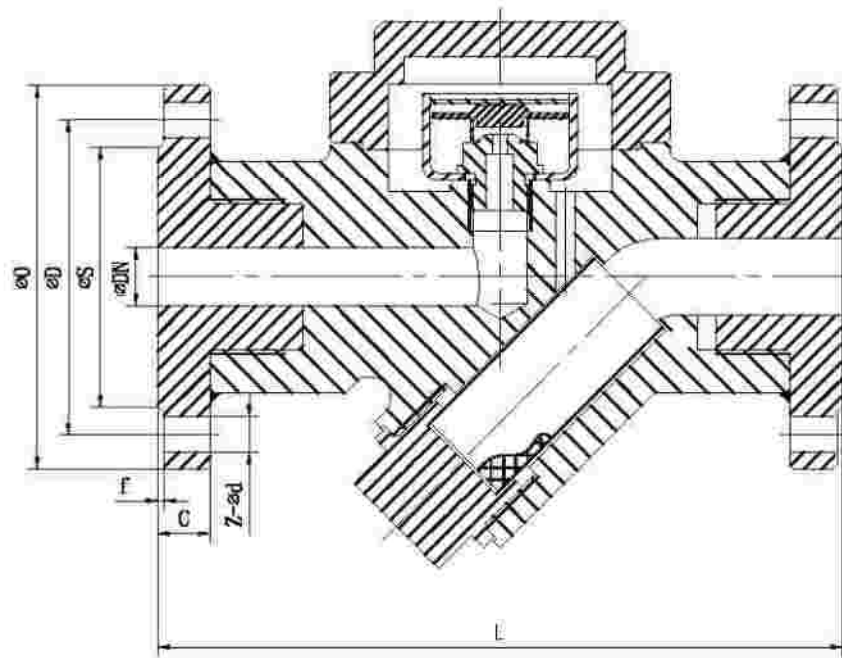

### Technical Requirements

1. Design & manufacture as to: JB/T9093-1999
2. Face-to-face dimension standard as to: GB/T12250-2005
3. Flange dimension conforms as to: ASME B16.5
4. Testing record as to: API598
5. Pressure-temperature conforms as to: ASME B16.34

### Performance Standard

Nominal Bore	1"	NPS
Nominal Pressure	150	Lb
Pressure test		
Shell Test	3.0	MPa
Seal Test	2.2	
Air Test	0.6	
Working Temperature	-29° C ~ +225° C	
Suitable Medium	W O G	

DN	L	O	D	S	C	f	Z-ød
25	160	110	79.5	51	14.5	1.6	4-16

COVER	1	A105		
Circlip	1	1Cr18Ni9Ti		
Membrane SHELF	1	1Cr18Ni9Ti		
MEMBRANE	1	1Cr18Ni9Ti		
SEAT	1	1Cr18Ni9Ti		
BODY	1	A105		
FILTER	1	1Cr18Ni9Ti		
FILTER POSITIONING	1	A105		
NAME	NO.	MATERIAL		



THE BEST SOLUTION TO YOUR CORROSIVE PROBLEMS

1605, Avenue 440,  
Suite 214A, Chemin de  
Laval, Québec, H7L 5W5,  
CANADA

Any Copy, Reproduction Or Translation Of This  
Information Either Wholly Or In Part, Without  
The Express Written Agreement Of VALVTEC  
Canada Is Expressly Forbidden