


NO	PARTS NAME	MATERIAL	QTY
8	LEVER	Cast iron	1
7	INDICATOR	CARBON STEEL	1
6	O-RING	EPDM	1
5	BUSHING	P.T.F.E.	4
4	STEM	SS316	1
3	SEAT	EPDM	1
2	DISC	GGG40	1
1	BODY	GGG40	1
TEST PRESSURE	SHELL	SEAL	
HYDROSTATIC	15 kg/cm ²	11 kg/cm ²	
AIR			
STAND-ARD	DESIGN CODE	BSS155	
	INSPECTION & TEST	DIN 3230 PART 3	
	END STANDARD	DIN PN10	
	FACE TO FACE	DIN 3202 K1	
TITLE : LEVER WAFER BUTTERFLY VALVE DN50-DN300			

2"	161	80	42	52.9	266	12.6	F07	30	90	70	4-10	4-18	125	90	11x11
2.5"	175	89	44.7	64.5	266	12.6	F07	30	90	70	4-10	4-18	145	90	11x11
3"	181	95	45.2	78.8	266	12.6	F07	30	90	70	4-10	4-18	160	45	11x11
4"	200	114	52	104	266	15.77	F07	30	90	70	4-10	4-18	180	45	11x11
5"	213	127	54.4	123.3	266	18.92	F07	30	90	70	4-10	4-18	210	45	14x14
6"	226	139	55.8	155.1	266	18.92	F07	30	90	70	4-10	4-22	240	45	14x14
8"	260	175	60.6	202.5	355	22.1	F10	40	125	102	4-12	4-22	295	45	17x17
10"	292	203	65.6	250.5	505	28.45	F10	40	125	102	4-12	4-22	350	30	22x22
12"	337	242	76.9	301.6	505	31.6	F10	40	140	102	4-12	4-22	400	30	22x22
SIZE	A	B	C	D	L0	d0	ISO5211	L	K	E	4-φd	4-φ	D1	8°	HxH

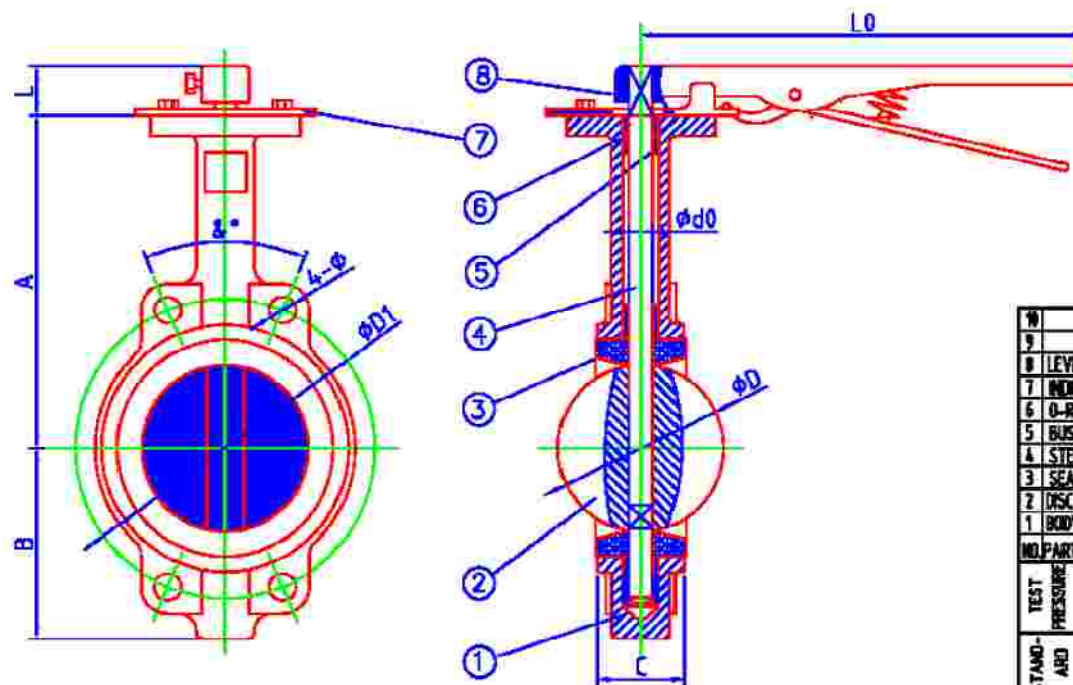

THE BEST SOLUTION TO YOUR CORROSIVE PROBLEMS

1605, Avenue 440,

Suite 211A, Chomedey

Local, Québec, H3L 3W3

CANADA

Any Copy, Reproduction Or Translation Of This

Information Either Wholly Or In Part, Without

The Express Written Agreement Of VALVTEC

Canada Is Expressly Forbidden