



VANNE A PAPILLON A BRIDE

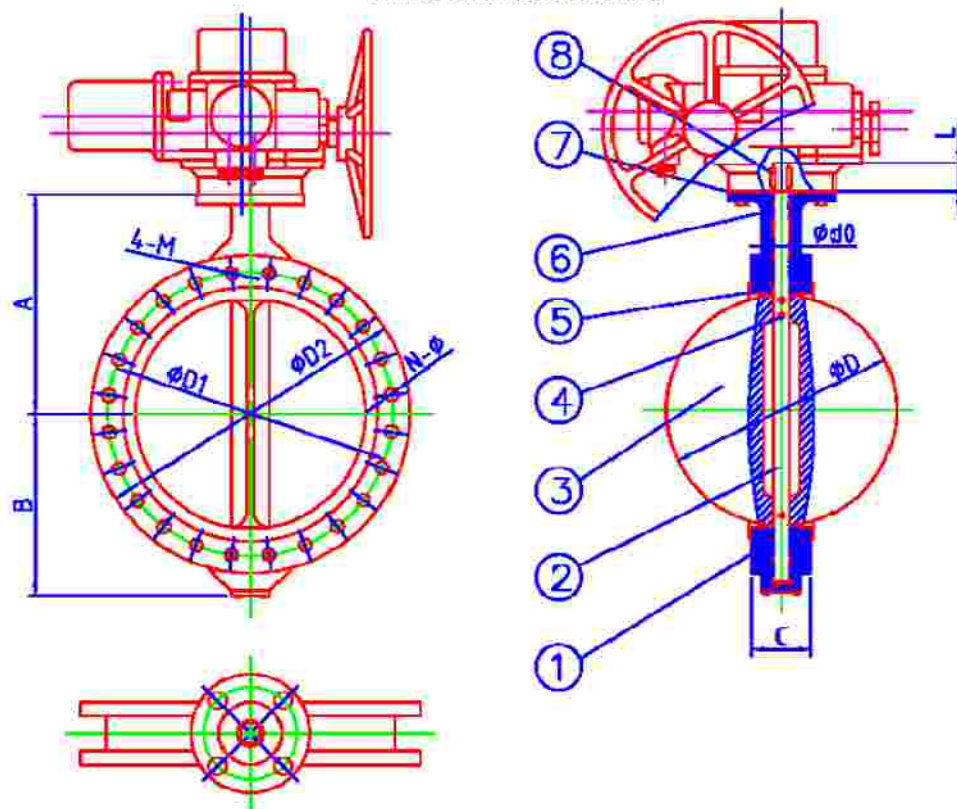

ELECTRICTOR 3 Phrase



8	KEY	CARBON STEEL	2	
7	O-RING	EPDM	2	
6	BUSHING	P.T.F.E.	5	
5	SEAT	EPDM	1	
4	PIN	SS410	3	
3	DISC	GGG40	1	
2	STEM	SS410	1	
1	BODY	GGG40	1	
NO.	PARTS NAME	MATERIAL	QTY	
TEST PRESSURE	HYDROSTATIC	SHELL 15 kg/cm²	SEAL 11 kg/cm²	
	AIR			
STANDARD	DESIGN CODE	BS5155		
	INSPECTION & TEST	DIN 3230 PART 3		
	END STANDARD	DIN PN10		
	FACE TO FACE	DIN 3202K1		

SIZE	A	B	C	D	Ød0	ØD1	N-φ	4-M	ØD2	L	ØK	ØE	8-φd	JX2
20"	624	520	163	695	63.35	Ø40	20-30	4-M27	895	100	300	254	8-φ18	18
30"	660	539	167	745	63.35	Ø60	20-33	4-M30	960	110	300	254	8-φ18	18
32"	672	591	188	795.4	63.35	Ø50	20-33	4-M30	1015	110	300	254	8-φ18	18
36"	720	656	203	854.7	75	Ø50	24-33	4-M30	1115	118	300	254	8-φ18	20
40"	800	721	216	965	85	Ø60	24-36	4-M36	1230	142	300	254	8-φ18	20
48"	940.7	844.1	276	1163	105	Ø80	28-39	4-M45	1455	154	350	298	22	28



THE BEST SOLUTION TO YOUR CORROSIVE PROBLEMS

1005, Avenue 190,
Suite 21-A, Chénodé,
Local Québec, H7L 3W1,
CANADA

Any Copy, Reproduction Or Translation Of This
Information Either Wholly Or In Part, Without
The Express Written Agreement Of VALVTEC
Canada Is Expressly Forbidden